



Plustek OpticFilm 8200i SE

Outstanding quality scans from negatives and slides

The **Plustek OpticFilm 8200i SE** is a 7200 dpi resolution scanner with state of the art illumination and optical systems designed to resolve very small differences in edge contrast. A built-in infrared channel can detect dust and scratches on the surface of the original negatives and slides. It is highly useful for defect removal without retouching the images.

The **OpticFilm 8200i SE** and LaserSoft Imaging's SilverFast software make for a good combination. Users can benefit from SilverFast's intelligent automatic functions which help to make the process of various adjustments much easier and get brilliant results. For example, SilverFast Multi-Exposure® reveals more shadow details and creates less image noise. SilverFast iSRD® uses the built-in infrared channel to remove dust and scratches without losing details, and SilverFast SCC® provides selective color changing with just one click.

The **Plustek OpticFilm 8200i SE** scanner is bundled with the newest version of LaserSoft Imaging's acclaimed scanner software - SilverFast. The WorkflowPilot® guides users through all scanning processes step by step. The new graphical user interface allows users to enjoy quality results with an easy learning curve, and the preview mode immediately shows the results of any adjustments. SilverFast is multitasking capable, and supports the latest 64-bit hardware. (For more information, please visit www.silverfast.com)



The **Plustek OpticFilm 8200i SE** offers the best film scanning solution for web sharing and printing. It targets all home users, lomographers, film photo enthusiasts from all professions, amateur photographers, professional photographers, and those who highly demand image quality.

Plustek OpticFilm 8200i SE

Outstanding quality scans from negatives and slides

Key Features

- 7200 dpi resolution
- 48-bit color depth
- 64-bit hardware and software support
- Hardware and Software solution for dust and scratch removal
- Advanced SilverFast SE Plus software bundled

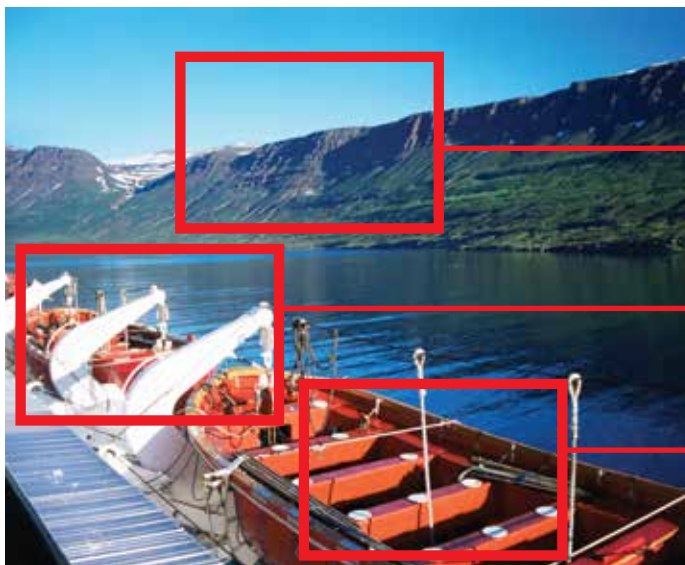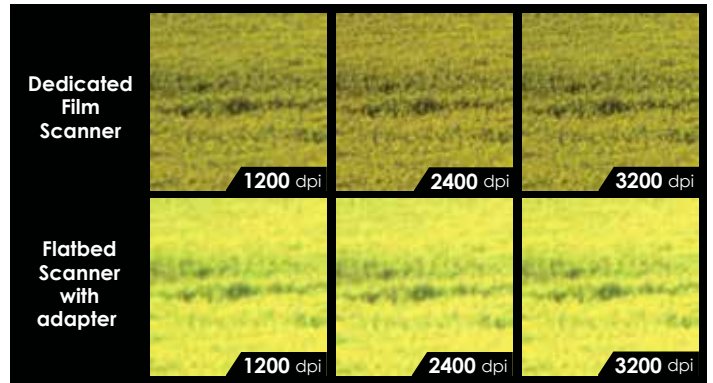

Software feature	Before	After
Multi-Exposure		
iSRD		
SCC		

Software Bundled



SilverFast® SE Plus

System Requirements

DVD Drive / One available USB Port / 2 GB RAM (4 GB Recommended) / 10 GB free HDD space / High Color graphic card (VGA or higher)

Windows : CPU: 2 GHz CPU or above

Windows 7/ 8/10/11

Macintosh : CPU: 2 GHz CPU or above (INTEL based CPU, NO PowerPC)

Mac OS X 10.7x-12.x or later ^[1]

Image Sensor	CCD
Light Source	LED
Hardware Resolution	7200 dpi
Scan Modes	Color: 48-bit input, 24/48-bit output Grayscale: 16-bit input, 8/16-bit output B/W: 1-bit
Dynamic Range	3.6
Infrared	Built-in
Scanning Speed	3600 dpi: Approx. 36 sec (Multi-Sampling ON) 7200 dpi: Approx. 113 sec (Multi-Sampling ON)
Scanning Area (W x L)	36.8 mm x 25.4 mm (1.45" x 1")
Preview Speed	Negative Film: Approx. 8 sec (Multi-Sampling ON) Positive Film: Approx. 8 sec (Multi-Sampling ON)
Action Button	IntelliScan, QuickScan
Power Supply	15 Vdc / 1.0 A
Interface	USB 2.0
Net Weight	1.6 Kgs (3.5 Lbs)
Dimensions (W x D x H)	120 x 272 x 119 mm (4.73" x 10.7" x 4.7")
Operating System	Windows 7 / 8 / 10 / 11 Mac OS X 10.7x-12.x or later ^[1]
Hardware Requirements	Windows PC 2 GHz Processor or faster 2 GB RAM main memory (4 GB RAM recommended) 10 GB free space on hard disk drive CD/ DVD drive or internet connection Mac 2 GHz Processor or faster (INTEL based processor, NO PowerPC) 2 GB RAM main memory (4 GB RAM recommended) 10 GB free space on hard disk drive DVD drive or internet connection

^[1] Compatibility may differ depending on the software's version. Please refer to the OS compatibility on Plustek's website for the latest info. The information and specifications contained in this document are subject to change without notice. Please visit Plustek website for the latest support information.

